


# SAC12023

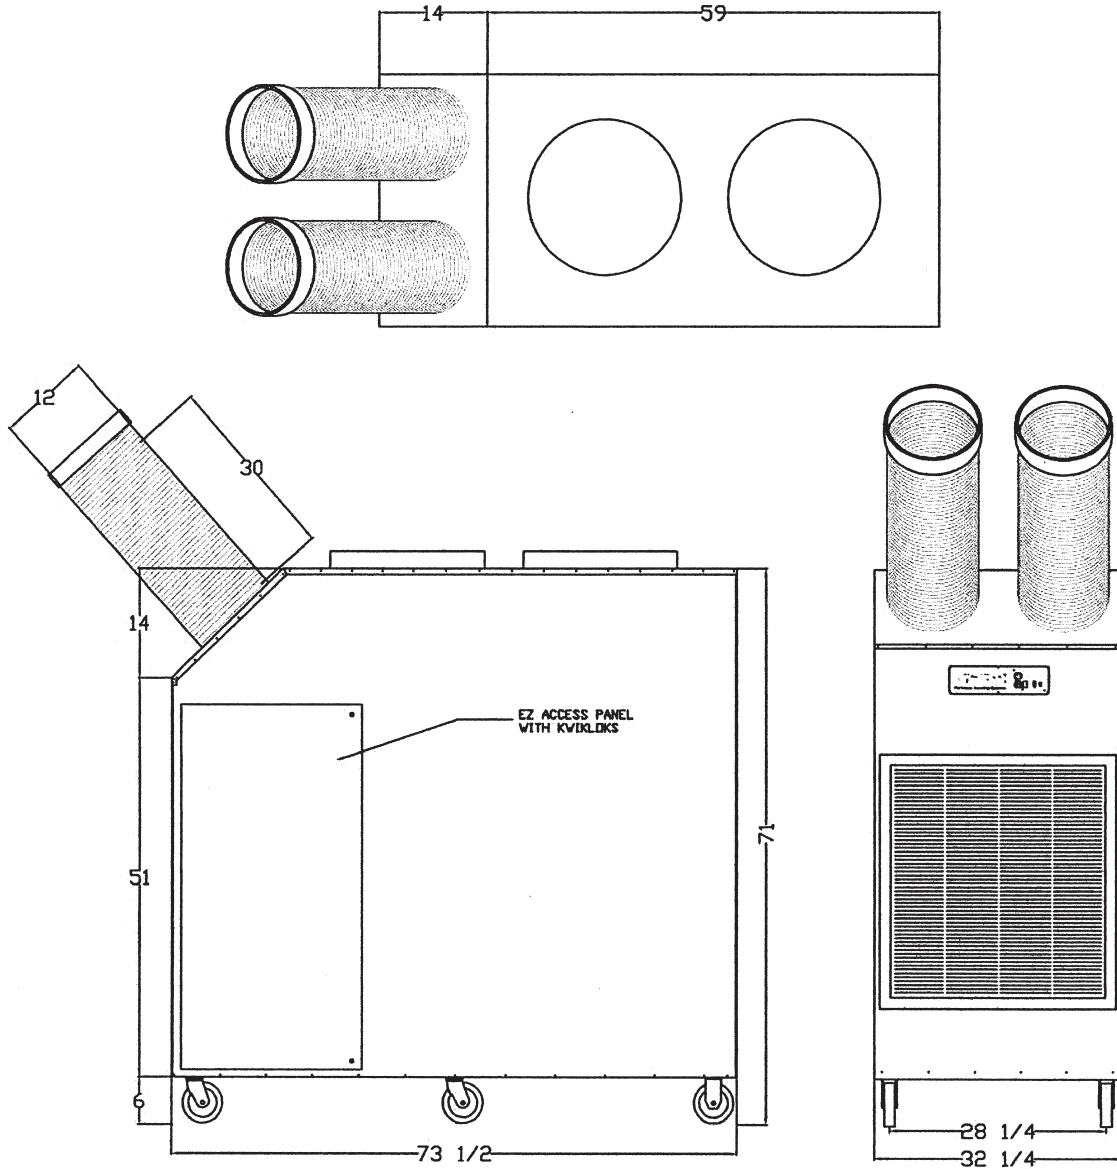

<b>COOLING CAPACITY</b>		
	BTU/hr @ 95°F at 60% RH	120,000 (10 Ton)
<b>COMPRESSOR DATA</b>		
	Compressor Type	Hermetic Recip. (2 Stage)
	Operating Temperatures	60°F-110°F 50% RH
<b>FAN DATA</b>		
<b>EVAPORATOR</b>		
	Fan Type (Centrifigul)	Direct Drive
	Air Flow (CFM) / Speeds	1800/3800
	Supply Air Data	2 -12x28"
	Supply Air Chute Max. Length	25'
	Motor HP	2
<b>CONDENSER</b>		
	Fan Type (Centrifigul)	Belt Drive
	Air Flow (CFM)	5000
	Condenser Hose Data	2 - 20"x8'
	Condenser Hose Max. Length	25'
	Motor HP	5
<b>ELECTRICAL DATA</b>		
	Power Supply (Volts)	208/230-3Ø
	Current Consumption (Amps)	71.8/64.8
	Power Consumption (KW)	15
	Circuit Breaker Size (Amps)	80/70
	Min/Max Voltage	195-225/210-250
	Power Cord Guage/Length	6AWG/10'
	Plug Configuration	Field Supplied
<b>DIMENSIONAL DATA</b>		
	Width (Inches)	32.25"
	Depth (Inches)	71
	Height (Inches)	68"
	Weight (Pounds)	1100
	Shipping Weight (Pounds)	1175
<b>SAFETY DEVICE DATA</b>		
	Compressor Overload	Internal
	Fan Motor Overload	Automatic Internal
	Evaporator Freeze-up	Constant Pressure/Fan Control
	High Pressure	Manual
	Low Pressure	Automatic
	Compressor Short Cycle	Yes
	Automatic Restart	Yes
	Thermostat	Digital Microprocessor
	Condensate Pump Overflow	Yes
	Condensate Tank Overflow	Yes