


SWAC12023

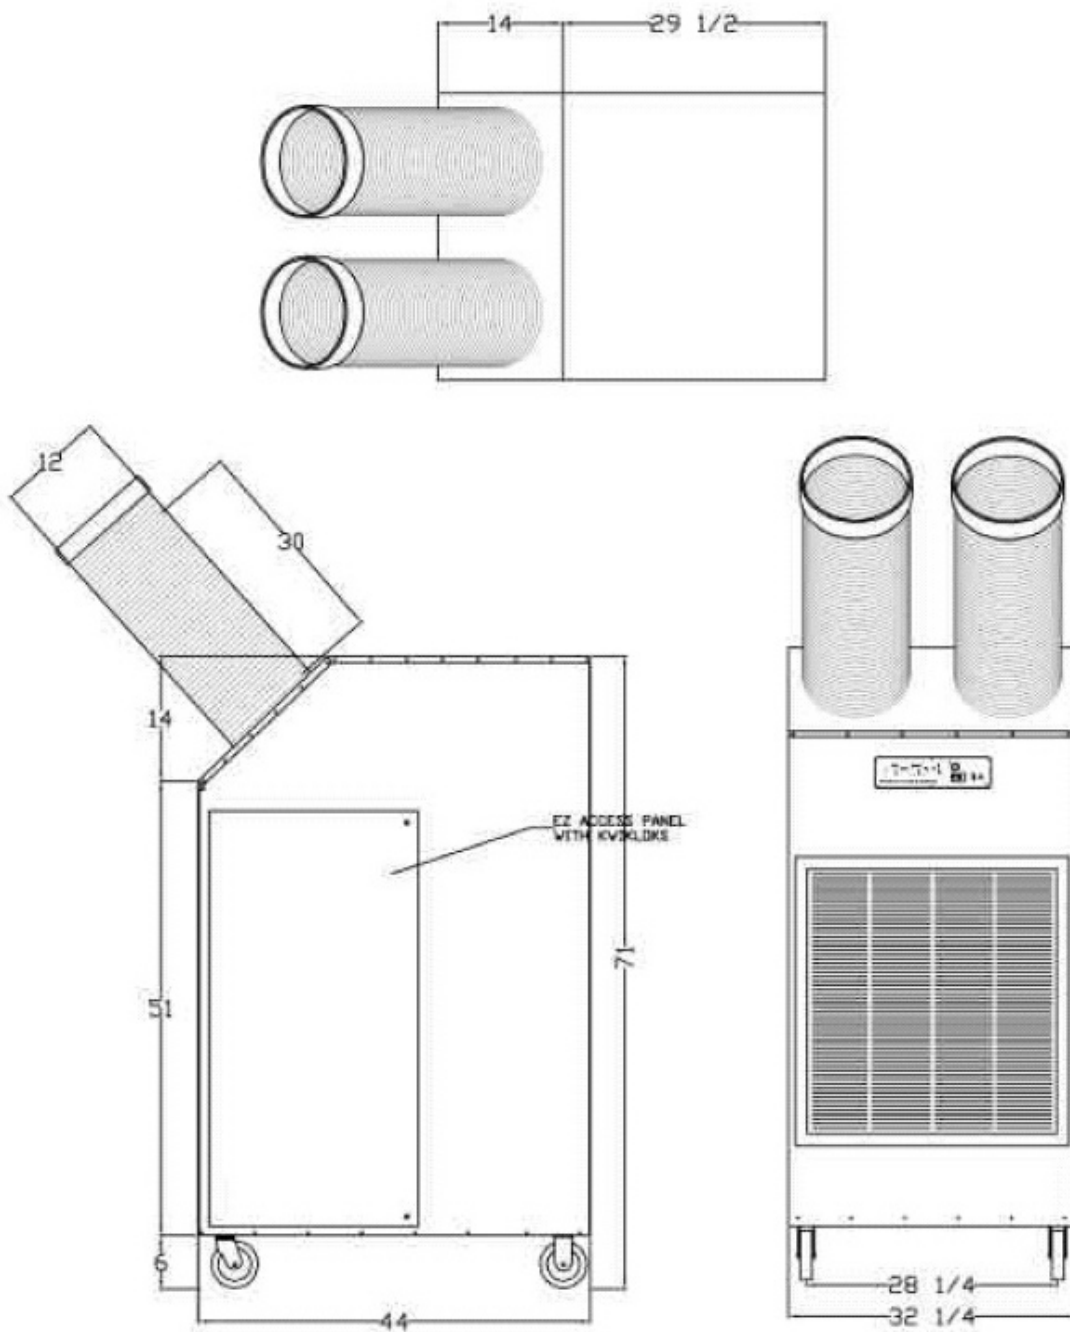

COOLING CAPACITY		
	BTU/hr @ 95°F at 60% RH	120,000 (10 Ton)
COMPRESSOR DATA		
	Compressor Type	Hermetic Recip./2 Stage
	Operating Temperatures	60°F-110°F 50% RH
FAN DATA		
EVAPORATOR		
	Fan Type (Centrifigul)	Belt Drive
	Air Flow (CFM) / Speeds	1800/3800
	Supply Air Data	2-12"Dia.x30"Length
	Supply Air Chute Max. Length	65'
	Motor HP	3
WATER FLOW DATA		
	Flow Regulating Valve	Automatic
	Inlet Water 85°F-95° F Exit (GPM)	30
	Inlet Water 75°F-95° F Exit (GPM)	15
	Inlet Water 65°F-95° F Exit (GPM)	10
	Inlet Water 55°F-95° F Exit (GPM)	7.5
ELECTRICAL DATA		
	Power Supply (Volts)	208/230-3 Phase
	Current Consumption (Amps)	40.9/45.5
	Power Consumption (KW)	16 1/3
	Maximum Circuit Breaker (Amps)	60/50
	Min. Circuit Ampacity (Amps)	69 5/7
	Min/Max Voltage	195-225/210-250
	Power Cord Guage/Length	8AWG/10
	Plug Configuration	Field Supplied
DIMENSIONAL DATA		
	Width (Inches)	32
	Depth (Inches)	44
	Height (Inches)	68
	Weight (Pounds)	750
	Shipping Weight (Pounds)	823
SAFETY DEVICE DATA		
	Compressor Overload	Internal
	Fan Motor Overload	Automatic Internal
	Evaporator Freeze-up	Hot Gas Bypass
	High Pressure	Manual
	Low Pressure	Automatic
	Compressor Short Cycle	Yes
	Automatic Restart	Yes
	Thermostat	Digital
	Condensate Pump Overflow	Yes
	Condensate Tank Overflow	Yes